

UPC ASSEMBLY INSTRUCTIONS

Design & Manufacture




Thank you for your purchase of one of many fine products designed & manufactured by UPC. We have made every effort to make your assembly easy, clear & hassle free. For more information or if you have any questions contact customer service at 1-800-859-7442.

PARTS BAG

UPC 8162C

Double 144 Pocket Spinner







| PART | Quantity | Reference |
|----------------|--------------|-----------|
| Push Pin | 26 (2 extra) | A |
| Trushead Screw | 20 (2 extra) | B |
| Header Clip | 2 | C |



TOOLS REQUIRED: #2 Phillips Screwdriver

PARTS LIST

| PART | Quantity | Reference |
|--------------|----------|-----------|
| Top Cap | 2 | D |
| Tower Panel | 6 | E |
| Base | 1 | F |
| Pockets | 144 | G |
| Tower Helper | 2 | H |

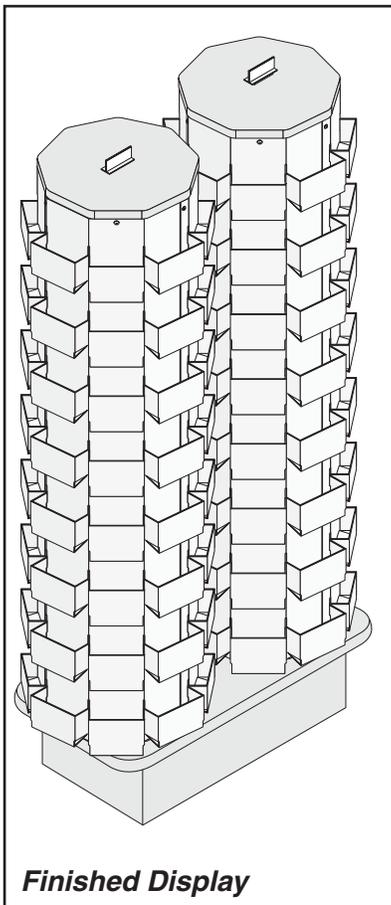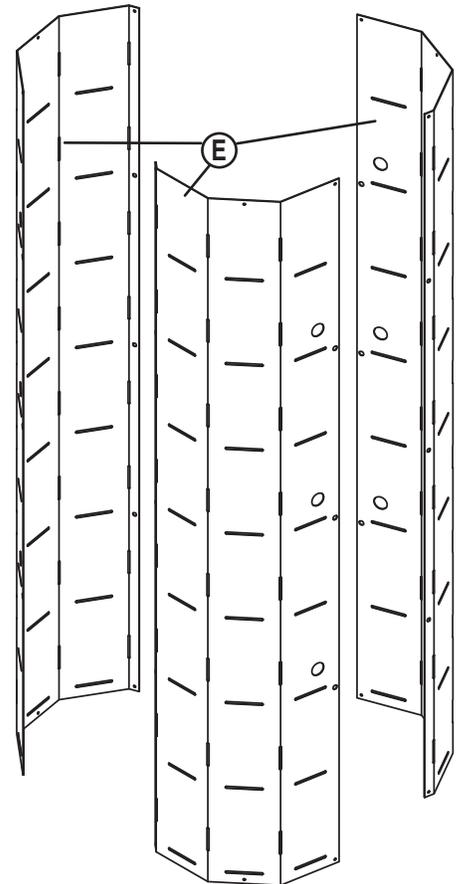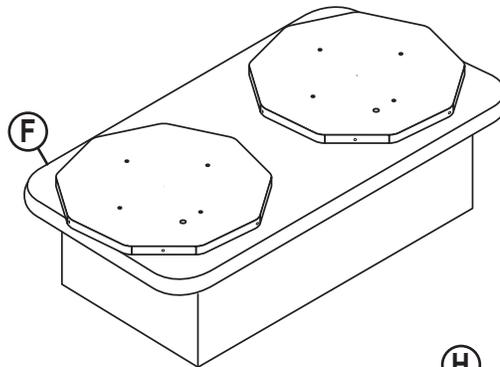

 **YouTube**
Instruction Video




Watch our easy
to follow
instruction video



www.upcdisplays.com/8162C

ASSEMBLY

- 2** This step will hold **Tower Panel Assembly (E)** up for installation to Base Assembly. Insert **(2) Tower Helpers (H)** under **Spinner Plate** on **Base (F)**, as shown to the right.

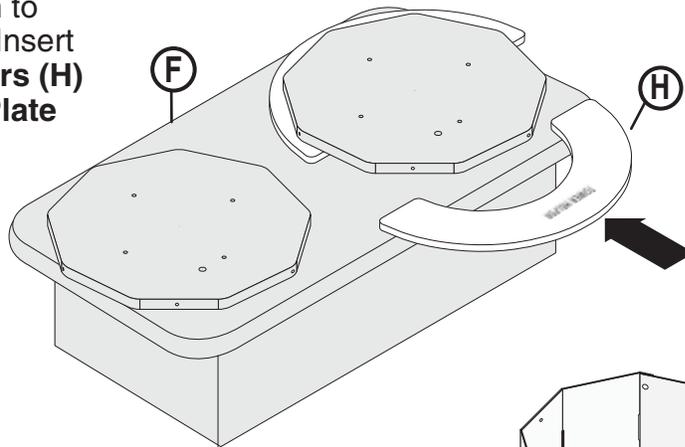

- 3** Align corresponding holes and set the **Tower Panel Assembly (E)** onto the **Base (F)**.

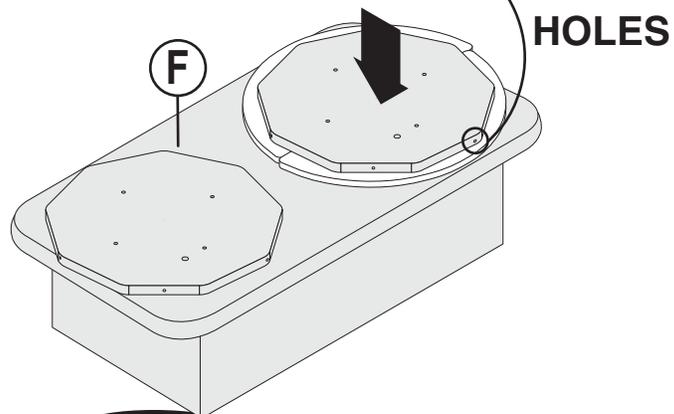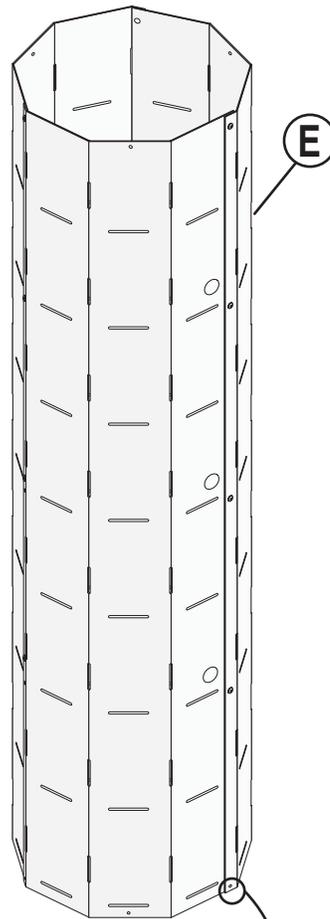

If you have any questions or need replacement parts, please call:

UPC Customer Service
1-800-859-7442

Design & Manufacture

U.S. PATENT NO.
8,534,472


If you have any questions or need replacement parts, please call:

UPC Customer Service
1-800-859-7442


Design & Manufacture

ASSEMBLY


- 4** Secure **Tower Panel Assembly (E)** to **Base (F)** at middle holes of Tower Assembly. Attach Tower Panels to Spinner Plate edge with **(3) Trusshead Screws (B)**.
DO NOT tighten completely!

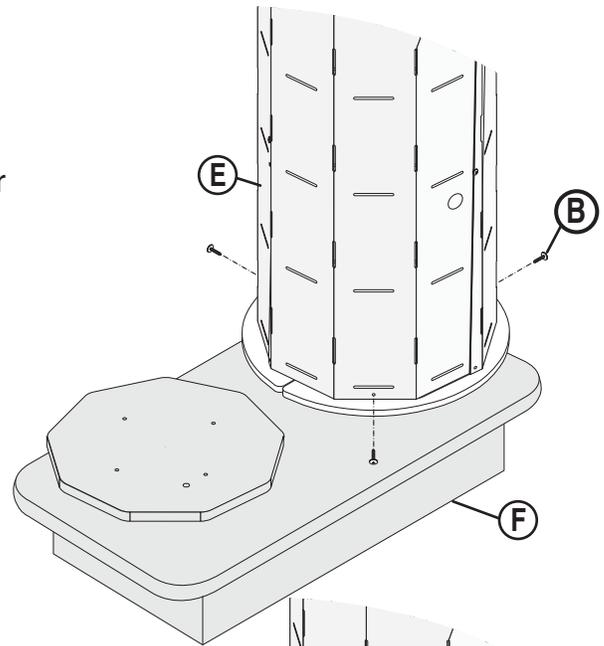

- 5** Continue to secure **Tower Panel Assembly (E)** to **Base (F)** at corner holes of Tower Panel Assembly. Attach panels to Spinner Plate edge with **(3) Trusshead Screws (B)**.
Tighten all **(6)** securely!

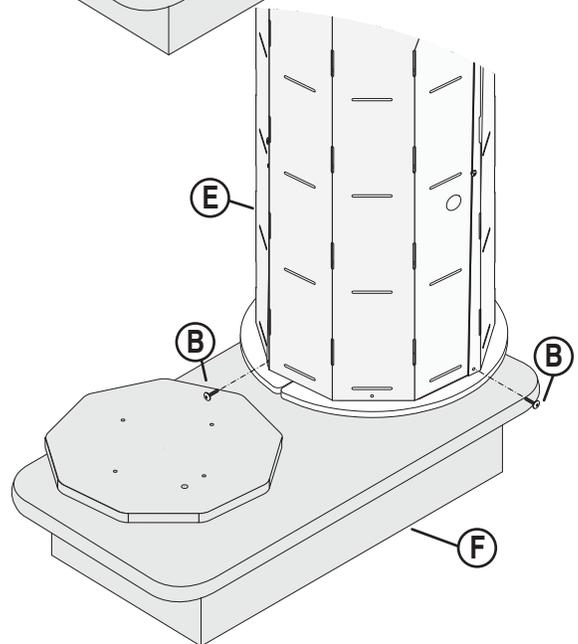

- 6** Remove **Tower Helpers (H)**.

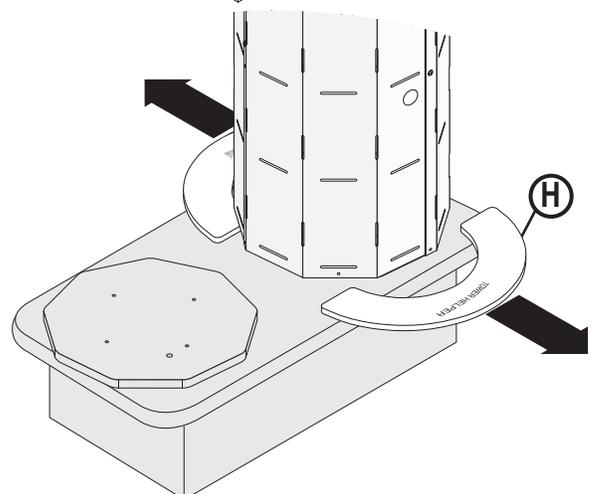

**REPEAT STEPS 1-6
FOR 2nd TOWER.**


If you have any questions or need replacement parts, please call:

UPC Customer Service
1-800-859-7442

Design & Manufacture

ASSEMBLY

- 7 Attach (2) **Header Clips (C)** to top of **Tower Panel Assemblies (E)** using attached Double Sided Tape.
- 8 Attach (2) **Top Caps (D)** to the top of the **Tower Panels Assemblies (E)** using (3) **Trusshead Screws (B)** for each **Top Cap (D)**.

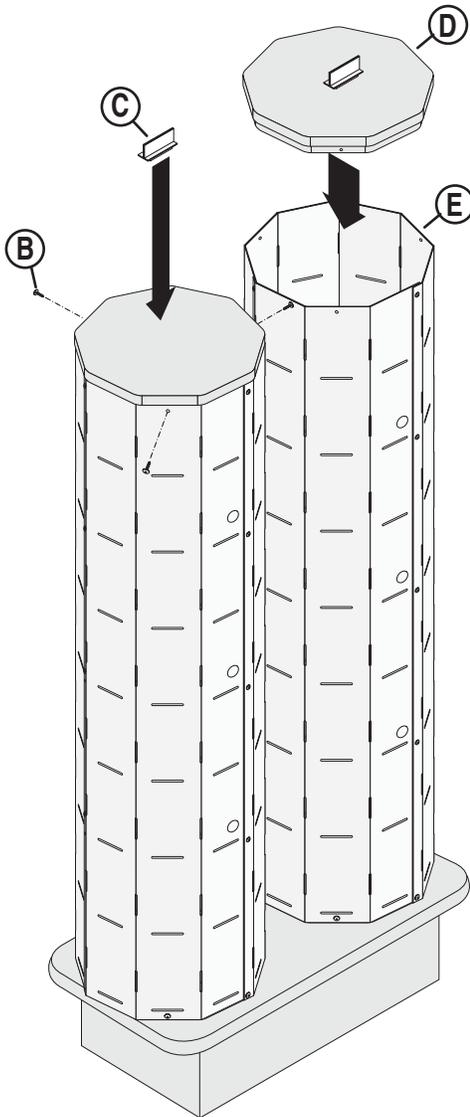

- 9 Attach **Pockets (G)** by hooking the side tabs into the vertical slots in the **Tower Panel Assemblies (E)**.
Lock Bottom tongue of **Pockets (G)** into the horizontal slots on the **Tower Panel Assemblies (E)**.
Each Vertical Slot holds two **Pockets (G)** side by side.

